


IC-M430/IC-M430E

CONNECTION GUIDE

Connect the transceiver and each device, as shown below.

① See the INSTRUCTION MANUAL that is included with the transceiver for details.

■ Rear panel

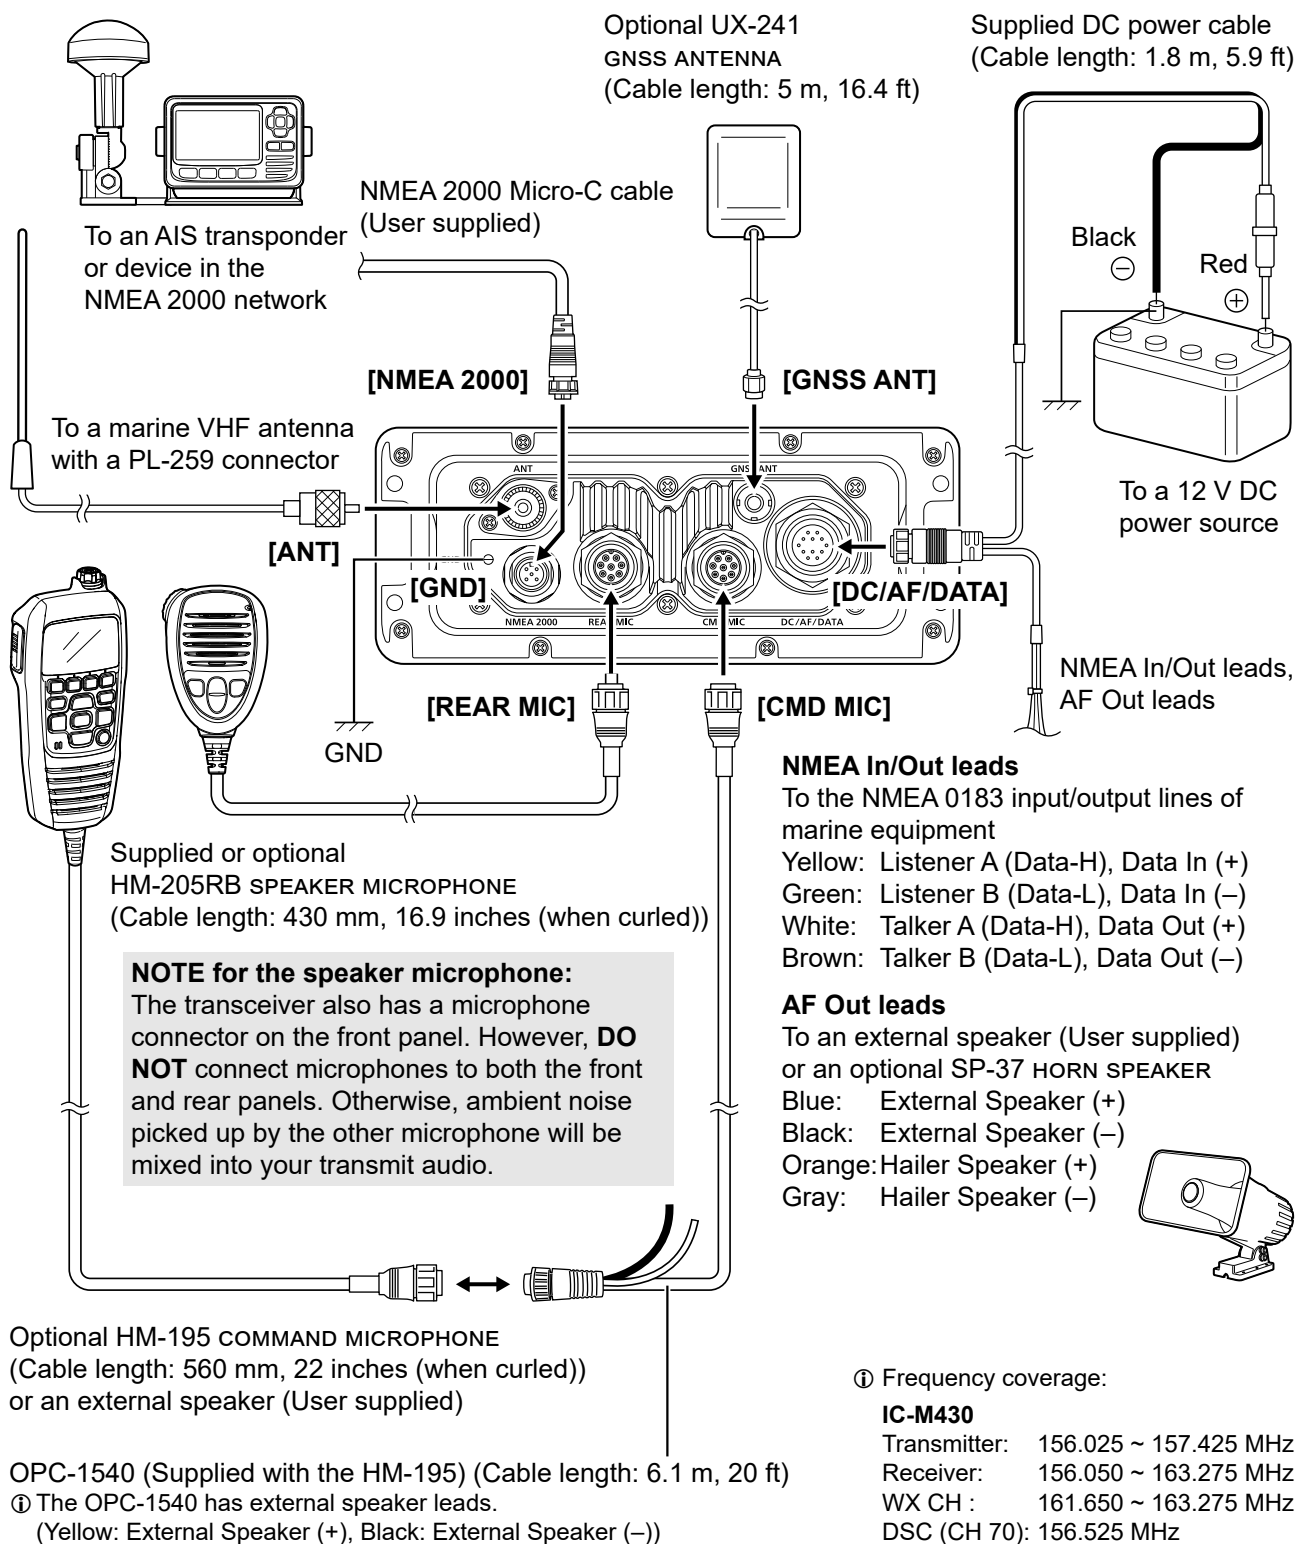

TIP: The optional microphone extension cable or conversion cable can be used.

① Frequency coverage:

IC-M430

Transmitter: 156.025 ~ 157.425 MHz
Receiver: 156.050 ~ 163.275 MHz
WX CH : 161.650 ~ 163.275 MHz
DSC (CH 70): 156.525 MHz

IC-M430E

Transmitter: 156.025 ~ 161.425 MHz
Receiver: 156.050 ~ 162.000 MHz
DSC (CH 70): 156.525 MHz