

ICOM

VHF AIR BAND TRANSCEIVER

IC-A22
IC-A22E



Super Compact NAV and COM portable.

This extra compact aviation transceiver features excellent audio quality on the COM side and a VOR receiver with CDI function on the NAV side. Check and compare the dimensions of the IC-A22/E with other so-called "portable" transceivers.

Navigation features

- Displays the radial heading TO or FROM the VOR station
- CDI (Course Deviation Indicator) shows deviation from original set course at a glance
- All 200 navigation channels
- ABSS (Automatic Bearing Set System) identifies the direct radial to the VOR
- Semi-duplex function allows you to contact flight services, etc. while receiving VOR signals (U.S.A. version only)

Compact size with superior audio

Compared to previous portable air band transceivers, the IC-A22/E truly is *portable*. However, the audio is not compromised—superior audio output that's easy to hear even without a headset.

Ergonomic keypad design provides convenient access to all functions and a rotary control allows quick and easy tuning of all frequency and memory channels.

Alphanumeric display

The IC-A22/E's function display features alphanumeric characters which allow you to store VOR ID's, airport ID's, etc. into memory for easy recall and quick visual recognition.

Built-in sidetone function

The sidetone function allows you to monitor your transmitted audio while using a headset. An aircraft headset adapter is supplied* with the IC-A22/E for this purpose as standard equipment.

*Not supplied with some versions.

And more...

- 50 memories with alphanumeric message capabilities
- One-touch selection of the 121.5 MHz emergency frequency
- Versatile scanning capabilities including a lockout function
- Receives all VHF FM marine weather channels (U.S.A. version only)
- DC connector allows operation with a 12 to 15 V DC power source
- Powerful 5 W of output power (5 W P.E.P. typ., 1.5 W carrier typ.)
- FET power module provides stable operation at high duty cycles
- Rugged die-cast aluminum chassis and polycarbonate casing for extraordinarily rugged use
- ANL (automatic noise limiter) function to reduce pulse-type noise
- Low battery indicator and over voltage caution indicator
- Accessories packed with the transceiver: Ni-Cd battery*, wall charger*, headset adapter*, belt clip, flexible antenna and carrying case*.

*Not supplied with some versions.

Icom Inc.

SPECIFICATIONS

GENERAL

- Frequency coverage (MHz):

Transmit	Communications	118.00–136.975
	Navigation	108.00–117.975
Receive	Communications	118.00–136.975
	Weather*	ch 01–ch 10

- Mode:
 - Tx/Rx AM (6K00A3E)
 - Rx FM (16K0G3E)*
- Channel spacing: 25 kHz
- Current drain (at 12 V DC):
 - Tx 1.0 A (typical)
 - Rx rated audio 400 mA (max.)
 - squelched 55 mA (typical)
- Usable temperature range: -10°C to +50°C (+14°F to +122°F)
- Frequency stability: ±20 ppm (-10°C to +50°C)
- Intermediate frequencies:
 - 1st 35.8 MHz
 - 2nd 455 kHz
- Weight: 465 g (16.4 oz) w/CM-166 and antenna


TRANSMITTER

- Output power: 5.0 W (PEP) 1.5 W (Carrier)
- Modulation system: Low level modulation
- Spurious emissions: Less than -60 dB

RECEIVER

- Sensitivity (for 6 dB S/N): Less than 1.0 µV
- Squelch sensitivity (tight): Less than 4.0 µV
- Selectivity:
 - More than 8 kHz/-6 dB
 - Less than 25 kHz/-60 dB
- Noise and hum: More than 25 dB
- Spurious response rejection ratio: More than 60 dB
- Audio output power: 600 mW with an 8 Ω load

*U.S.A. version only.

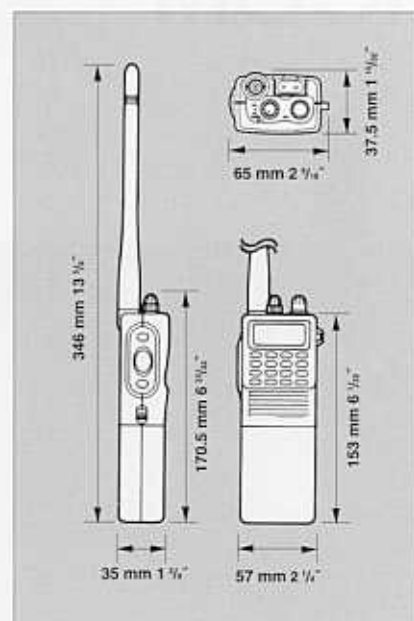

All specifications are subject to change without notice or obligation.

OPTIONS

■ BATTERY PACK AND BATTERY CASE

- CM-166** Ni-Cd BATTERY PACK
12 V, 600 mAh rechargeable battery pack provides 5 hours of operation (at a duty cycle of 5:5:90/Tx:Rx:standby). The same as supplied with the transceiver (not supplied with some versions).
- CM-167** BATTERY CASE for R6(AA) size X 10 alkaline batteries.

■ CHARGERS AND CABLES

- BC-119** DESKTOP CHARGER
+ **AD-50** DESKTOP CHARGER ADAPTER + **AD-75** CONNECTION BOARD
For rapid charging a battery pack. An AC adapter and the AD-75 may be supplied with the charger. Charging time: 1 to 1.5 hrs.
- BC-121** MULTI-CHARGER
+ **AD-50** DESKTOP CHARGER ADAPTER + **AD-75** CONNECTION BOARD
For charging up to 6 batteries simultaneously. An AC adapter may be supplied depending on version. Six AD-50's are necessary. Charging time: 1 to 1.5 hrs.
- BM-112U/E** WALL CHARGER
Regularly charges the CM-166 in approx. 15 hrs. Similar to the one supplied with the transceiver.

- CP-17L** CIGARETTE LIGHTER CABLE
For operation with a 12 V cigarette lighter socket.
- OPC-515L** DC POWER CABLE
For operation and charging with a 12–15 V DC power supply.

■ OTHERS

- HM-112** SPEAKER-MICROPHONE
Provides convenient lightweight operation while setting the transceiver in the cockpit or hanging it from your belt, etc.
- LC-122** CARRYING CASE
Fits the transceiver with the supplied CM-166.
- MB-24/MB-25** MOUNTING BRACKETS
Hang the transceiver via belt clip to:
MB-24: the inside door panel of a vehicle.
MB-25: a flat surface inside an aircraft.
- OPC-499** HEADSET ADAPTER CABLE
Allows you work with most aviation headsets. Provides the side tone function. Some versions already contain this as an accessory.



Icom Inc. 6-9-16, Kamihigashi, Hirano-ku, Osaka 547, Japan Phone: 06 793 5302 Fax: 06 793 0013

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
Telex: 152210 ICOM AMER BVUE

<Customer Service>
Phone: (425) 454-7619

Icom Canada

A Division of Icom America Inc.
3071 #5 Road, Unit 5, Richmond, B.C., V6X 2T4, Canada
Phone: (604) 273-7400 Fax: (604) 273-1900

Icom (Australia) Pty. Ltd.

A.C.N. 008 092 575
280-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022

Icom (Europe) GmbH

Communication Equipment
Himmelsgaister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639

Icom Telecomunicaciones s.l.

"Edificio Can Castanyer" C/ta. Gracia a Manresa km. 14,750
08190 Sant Cugat Del Valles Barcelona, SPAIN
Phone: (3) 589 46 82 Fax: (3) 589 04 46

Icom (UK) Ltd.

Unit 9, Sea St., Heme Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
Telex: 317210 BUREAU G

Icom France S.a

Zac de la Plaine, Rue Brindejont des Moulins
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
Telex: 521515 ICOM FRA

Your local distributor/dealer: