

iOS APPLICATION

RS-MS11

This application is designed for iOS devices. With the RS-MS11, you can use the extended D-STAR functions to exchange pictures or messages, or display received D-PRS station data on a map application.

System requirements

The following system is required to use the RS-MS11.

- iOS version 16 or later, iPadOS version 16 or later
The RS-MS11 has been tested with iOS version 16, 17, 18, and 26 and iPadOS version 16, 17, 18, and 26.

① Information

- The RS-MS11 may not work with some iPhones or iPads, even if they are one of the tested devices.
- The RS-MS11 may not work, depending on the OS version, installed application, and so on.
- These Instructions are based on using RS-MS11 version 1.4.0 and iOS 18.7.1. Depending on the OS version or setting, the indications or items may differ.
- The screen shots on these Instructions are just examples, so the contents may differ from the actual ones.

This product includes "libjpeg-turbo" open source software, and is licensed according to the open source software license.

This software is based in part on the work of the Independent JPEG Group.

This product includes "PEPhotoCropEditor" open source software, and is licensed according to the open source software license.

This product includes "FMDB" open source software, and is licensed according to the open source software license.

Refer to the "About the Licenses" page at the end of this manual for information on the open source software being used in this product.

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries.

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license.

IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Apple, iPad, iPhone, and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries.

iPadOS is a trademark of Apple Inc., registered in the U.S. and other countries and regions.

The iPhone trademark is used under license from AiPhone Co., Ltd.

Google is registered trademark or trademark of Google, LLC.

All other products or brands are registered trademarks or trademarks of their respective holders.

Thank you for choosing this Icom product. **READ ALL INSTRUCTIONS** carefully and completely before using this product.

Operating notes

- Bluetooth LE is used to connect with the transceiver, so there may be a time delay between the transceiver's operation and the display on the iPhone or iPad.
- When the device's screen is locked, or the RS-MS11 is in the Background mode, the Bluetooth connection may be canceled.
- When sending or receiving pictures using "FAST mode," depending on the transceiver, the headset audio may be temporarily interrupted because of the transceiver's Bluetooth unit limitations.
- When connecting or disconnecting the transceiver and a Bluetooth Headset, the connection between the transceiver and this application may be disconnected. If Bluetooth disconnects, try to connect again from either the application or the transceiver.
① We recommend disconnecting the Bluetooth Headset from the transceiver before operating this application.
- You may need to connect to the Internet through a Wireless LAN or a cellular network for some functions.
- The RS-MS11 supports only portrait orientation with the iPhone. It does not support Auto Rotate. However, landscape orientation and Auto Rotate are supported with the iPad.
- Connection Device List is shared with other Icom applications, so devices that cannot be connected may also appear in the list. You cannot use these devices, even if they are listed.

NOTE: Before using the RS-MS11, set the following items on the transceiver.

- Set the "CI-V Transceive" item to "ON."
- ID-4100A/ID-4100E/ID-52A/ID-52E/ID-52A PLUS/ID-52E PLUS:
Function > CI-V > **CI-V Transceive**
- IC-705/ID-5200A/ID-5200E:
Connectors > CI-V > **CI-V Transceive**
- Set the "Serial Port Function" item to "CI-V (Echo back OFF)."
(Bluetooth Set > Data Device Set > **Serial Port Function**)

Compatible functions


	ID-4100A ID-4100E	ID-52A ID-52E	ID-52A PLUS ID-52E PLUS	IC-705	ID-5200A ID-5200E
DV Fast Data	✓	✓	✓	✓	✓
DR function	✓	✓	✓	✓	✓
Share Pictures	✓	✓	✓	✓	✓
Text Messaging	✓	✓	✓	✓	✓
Map	✓	✓	✓	✓	✓
Offline Map	N/A	N/A	N/A	N/A	N/A
RX History	✓	✓	✓	✓	✓
Your Call sign	✓	✓	✓	✓	✓
Repeater list	✓	✓	✓	✓	✓
Transceiver Setting	✓	✓	✓	✓	✓
Application Setting	✓	✓	✓	✓	✓
Import	✓	✓	✓	✓	✓
Export	✓	✓	✓	✓	✓
USB Connection	N/A	N/A	N/A	N/A	N/A
Bluetooth Connection	Requires UT-137 or UT-137A Bluetooth UNIT	✓	✓	✓	✓

N/A: Not Applicable

① The compatible transceivers differ, depending on the application version.

Menu item description

This section describes the Menu items.

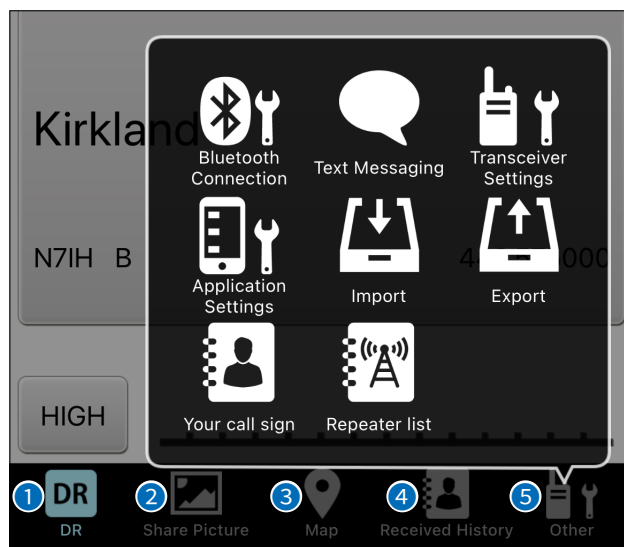

1 [DR] (p. 4)

Sets the DR function's [FROM] and [TO] settings.

2 [Share Pictures] (p. 5)

- Transmits a picture using the data communication function.
- ① The DV Fast Data function is also usable.
- Displays the received or transmitted pictures.

3 [Map] (p. 6)

- Displays the location of the caller or repeater on a map.
- Sets the [FROM] or [TO] settings from the data displayed on the map.

4 [RX History] (p. 7)

- Displays the received DV call information.
- Goes to the user's information site.

TIP: The DV Fast Data function uses the data and the audio frames to send data approximately 3.5 times faster than the normal speed. While holding down [PTT], audio can also be sent with a picture or message, but only at the normal speed.

5 [Other]

[Bluetooth Connection]

Connects to the transceiver using Bluetooth.

[Text Messaging] (p. 7)

- Transmits messages using the data communication function.
- Displays the received or transmitted messages.

[Transceiver Setting]

Sets certain transceiver's settings.

- ① Not all the transceiver's settings can be set with the RS-MS11.

[Application Setting]

Sets the RS-MS11 settings, such as the display unit of measure.

[Import] (p. 8)

Imports the Repeater List and Your Call Sign Memory.

[Export] (p. 8)

Exports the Repeater List, Your Call Sign Memory, and RX History.

[Your Call sign] (p. 9)

Adds or edits Your (UR) call signs used in the DV mode.

[Repeater list]

Displays the Repeater List contents.

- ① The Repeater List is not synchronized with the transceiver's list. Before using this application, import the same list as your transceiver. (p. 8)

DR

You can set the [FROM] and [TO] settings for the DR function.

Call signs and other various parameters can be set on this screen.

DR

TX DV DUP+

TO: 

CQCQCQ

FROM:

Kirkland

N7IH B 443.575000

HIGH


DR Share Picture Map Received History Other

Share Pictures

[Send]

You can transmit a picture that is on your iOS device, through the transceiver.

- Touch the screen (in a blue box area shown below) for 1 second to open the “Select the picture” window. Then select an option where the picture you want to send is saved.

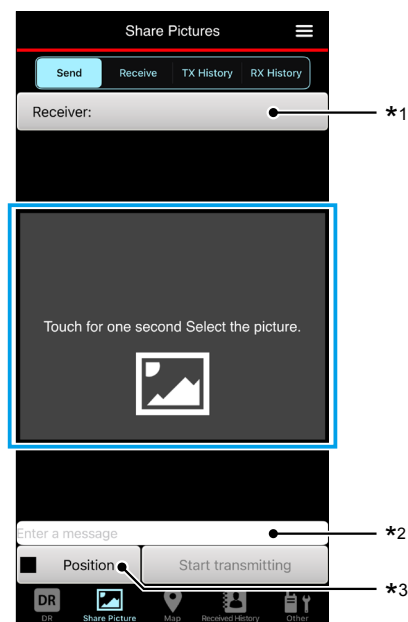

[Receive]

Displays the received picture.

- Tap [Save] to save the received picture on the iOS device.
 - ① The picture is automatically saved in the “Photos” application in the iOS device.



- *1 Tap [Receiver], then select a receiver's call sign to let all stations that receive the picture know the picture's target receiver. All stations that receive the signal can see the picture, even if they are not set as the receiver.
- *2 You can transmit the message entered on this field.
- *3 To send position data, tap [Position], then select an option to enter the position data.


[TX History]

Displays the transmitted picture list.

Up to 500 pictures can be saved.

When you transmit the 501st picture, the oldest picture will automatically be deleted.

- Tap a picture to retransmit it from TX History.
- Swipe a picture to the left to delete it from TX History.

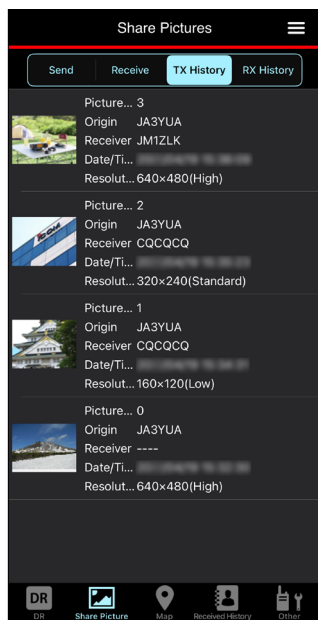


[RX History]

Displays the received picture list.

Up to 500 pictures can be saved.

When you receive the 501st picture, the oldest picture will automatically be deleted.

- Tap a picture to save it.
- Swipe a picture to the left to delete it from RX History.

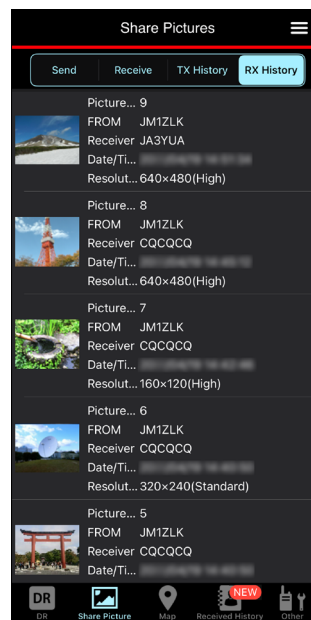


Map

The map screen displays the location of your (MY) station, the DV repeater, FM repeater, or a caller, with an icon, if the repeater or the caller's signal contains position data.

- Tap the icon to display the information window.
- Tap the information window to set [FROM] or [TO] for the DR function.

TIP: When you import the repeater list, update the repeaters on the map:

1. Tap the Menu button on the upper right of the screen, and then tap "DV Repeater station OFF" or "FM Repeater station OFF."
2. After loading, tap the Menu button again, and then tap "DV Repeater station ON" or "FM Repeater station ON."

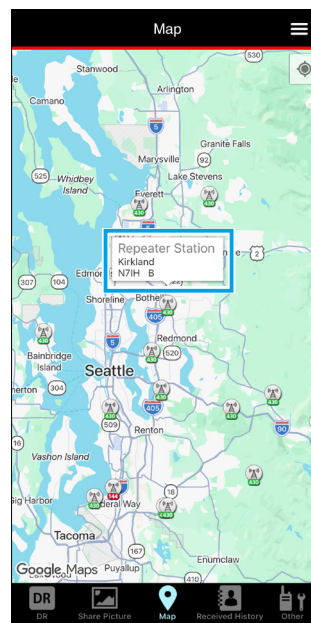

©Google

RX History

View the Received History list.


Up to 10000 records can be saved.

When you receive the 10001st DV call, the oldest record will be automatically deleted.

- Tap a record to display the detail information.

① Information

- The RX History is automatically saved in the RS-MS1I, in the “csv” format.
- You can export the RX History to your PC using iTunes. (p. 9)
- You can search or delete an RX History entry by tapping the Menu button that is on the upper right of the screen.

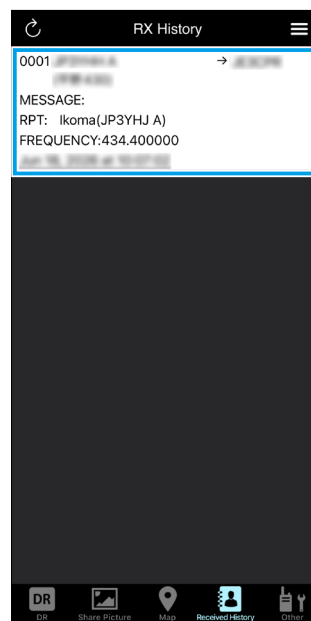

Text Messaging


You can transmit messages from the transceiver.

After transmitting, the message is displayed on the right side of the display.

If you set “Receiver,” the name of the receiver is displayed instead of “----.”

After receiving, it is displayed on the left side of the display.


- ① “(Picture attached)” is displayed under the call sign when a picture is transmitted with the message.

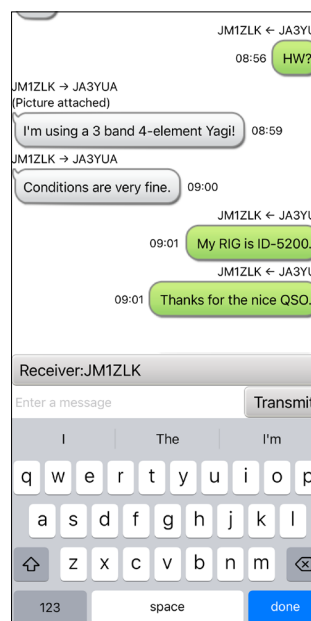

Import

You can import the Repeater List or Your Call Sign Memory in the “csv” format.

- ① You can download the latest repeater list from the Icom website by tapping “Repeater List,” and then “Download from Internet.”
- ① You can import the repeater list from your PC using iTunes. (p. 9)

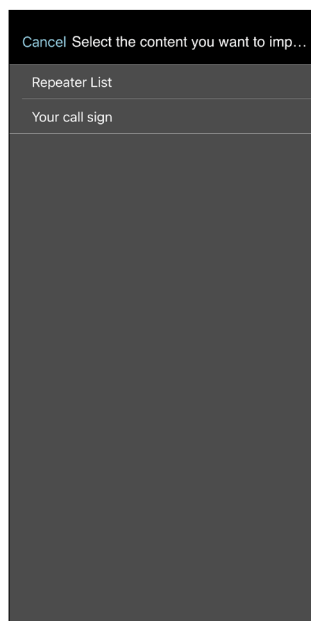


Export

You can export the Repeater List, Your Call Sign Memory or RX History.

- ① The exported file is automatically saved in the RS-MS11.
- ① You can export the files to your PC using iTunes.

The files names are automatically created in the format shown below.

- Your Call Sign: YourCallSignList_date.csv
 - Repeater list: RepeaterList_date.csv
 - RX History: RXHistoryList_date.csv
- ① The RX History is automatically saved as a log in the RS-MS11.

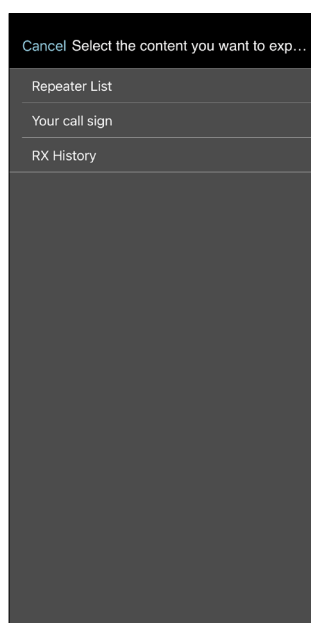



Your Call sign

View the Your (UR) call sign list.

You can enter up to 500 Your (UR) call signs.

- Tap “+” to display the “Add to Your call sign” window.

- ① When you add the 501st call sign, a warning message is displayed. In that case, delete an already-entered call sign, and then try again.

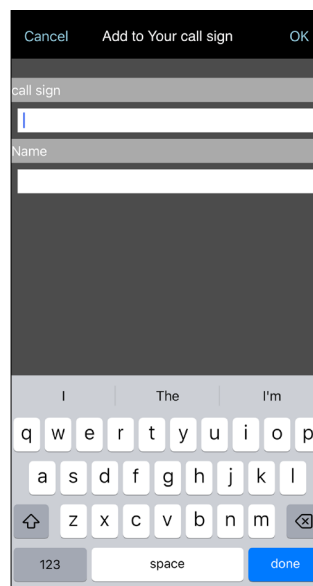


Operating tip


- You can import or export files between your PC and the applications on your iOS device using the File Sharing function of iTunes.

- ① See the Apple Inc.'s website about installation and system requirements.
See the iTunes Help file about the File Sharing function and device synchronization.

- If you did not allow the Bluetooth connection when you started RS-MS1I for the first time, you need to turn ON Bluetooth on the screen displayed by tapping “Settings” > “RS-MS1I” on your iOS device.

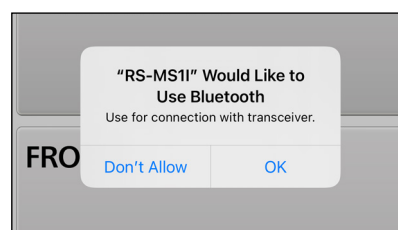

Bluetooth permission message



Turn ON the Bluetooth of RS-MS1I

About the licenses

libjpeg-turbo Licenses

libjpeg-turbo is covered by three compatible BSD-style open source licenses:

- The IJG (Independent JPEG Group) License, which is listed in README.iyg
This license applies to the libjpeg API library and associated programs (any code inherited from libjpeg, and any modifications to that code.)
- The Modified (3-clause) BSD License, which is listed below
This license covers the TurboJPEG API library and associated programs, as well as the build system.
- The zlib License
This license is a subset of the other two, and it covers the libjpeg-turbo SIMD extensions.

Complying with the libjpeg-turbo Licenses

This section provides a roll-up of the libjpeg-turbo licensing terms, to the best of our understanding.

1. If you are distributing a modified version of the libjpeg-turbo source, then:
 - i. You cannot alter or remove any existing copyright or license notices from the source.
Origin
 - Clause 1 of the IJG License
 - Clause 1 of the Modified BSD License
 - Clauses 1 and 3 of the zlib License
 - ii. You must add your own copyright notice to the header of each source file you modified, so others can tell that you modified that file (if there is not an existing copyright header in that file, then you can simply add a notice stating that you modified the file.)
Origin
 - Clause 1 of the IJG License
 - Clause 2 of the zlib License
 - iii. You must include the IJG README file, and you must not alter any of the copyright or license text in that file.
Origin
 - Clause 1 of the IJG License
2. If you are distributing only libjpeg-turbo binaries without the source, or if you are distributing an application that statically links with libjpeg-turbo, then:
 - i. Your product documentation must include a message stating:
This software is based in part on the work of the Independent JPEG Group.
Origin
 - Clause 2 of the IJG license
 - ii. If your binary distribution includes or uses the TurboJPEG API, then your product documentation must include the text of the Modified BSD License (see below.)
Origin
 - Clause 2 of the Modified BSD License
3. You cannot use the name of the IJG or The libjpeg-turbo Project or the contributors thereof in advertising, publicity, etc.
Origin
 - o IJG License
 - o Clause 3 of the Modified BSD License
4. The IJG and The libjpeg-turbo Project do not warrant libjpeg-turbo to be free of defects, nor do we accept any liability for undesirable consequences resulting from your use of the software.
Origin
 - o IJG License
 - o Modified BSD License
 - o zlib License

The Modified (3-clause) BSD License

Copyright (C)2009-2021 D. R. Commander. All Rights Reserved. Copyright (C)2015 Viktor Szathmáry. All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the libjpeg-turbo Project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS", AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Why Three Licenses?

The zlib License could have been used instead of the Modified (3-clause) BSD License, and since the IJG License effectively subsumes the distribution conditions of the zlib License, this would have effectively placed libjpeg-turbo binary distributions under the IJG License. However, the IJG License specifically refers to the Independent JPEG Group and does not extend attribution and endorsement protections to other entities. Thus, it was desirable to choose a license that granted us the same protections for new code that were granted to the IJG for code derived from their software.

PEPhotoCropEditor License

The MIT License

Copyright (c) 2013 kishikawa katsumi

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

FMDB License

If you are using FMDB in your project, I'd love to hear about it. Let Gus know by sending an email to gus@flyingmeat.com.

And if you happen to come across either Gus Mueller or Rob Ryan in a bar, you might consider purchasing a drink of their choosing if FMDB has been useful to you.

Finally, and shortly, this is the MIT License. Copyright (c) 2008-2014 Flying Meat Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.